

Description

The Relcom FCS-A11 Battery Pack is an accessory for the Relcom Power Hub. It allows the Power Hub to be used in remote areas where AC power is not available. In this way Fieldbus devices may be powered and configured before the entire Fieldbus system is ready. This can help streamline the time critical commissioning process.

Battery power for a Power Hub is also useful for a portable demonstration system.

The Battery Pack contains three (3) user replaceable 9V Alkaline batteries that will supply power for two (2) Fieldbus devices for about 14 hours (or one device for about 28 hours).

A short piece of DIN Rail is fixed to the Battery Pack so that the Power Hub may be attached to it. This makes a convenient package for easy user mobility.

Power is transferred from the Battery Pack to the Power Hub with a short DC Cable. This cable is plugged into the Power Hub instead of the Wall Transformer that comes with the Power Hub. The cable must be unplugged to prevent draining the battery when it is not in use.




FCS-A11

Specifications:

Battery life (load dependent): 14 hours (@40mA)*
Maximum current: 100mA
Overload protection (internal): 100mA Resettable fuse
Output Voltage: 18-29VDC
Temperature Range: 0 to +50 °C

Certifications: **CE**

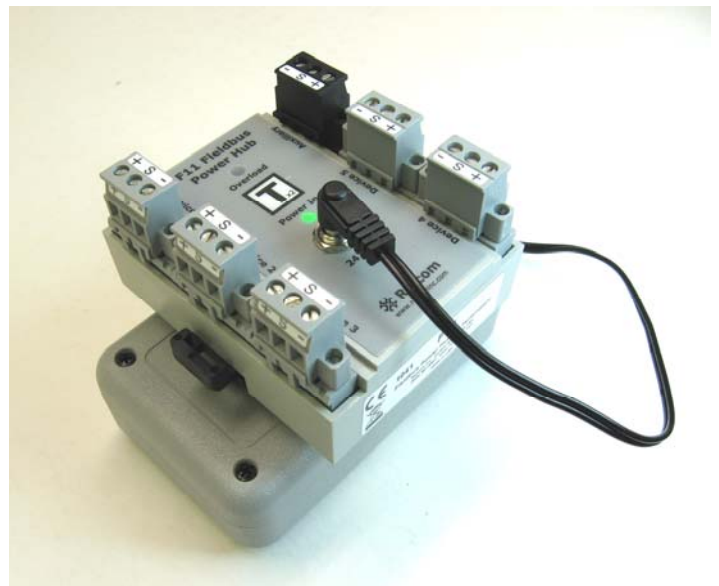

FCS-A11 with F11 (sold separately)

* Rating depends on battery characteristics and ambient temperature.

Product Specifications subject to change without notice.